





The team at eXterrain believe it is important to have the right vehicle, accessories and outdoor equipment. eXterrain is an established company bringing forward a new vision for 4WD lighting products within Australia - without compromising affordability and reliability.

eXterrain products are based on thorough research and have endured stringent testing. We pride ourselves on the quality of our products and ensure great value and service.

Proudly Australian owned and operated, eXterrain distribute 4WD Lighting and Lighting accessories.

Follow us on social media













eXterrain's Raven Super Slim Single Row bar light series are ideal for 4WD and truck installation. These lights have a combo beam of 10°+ 40° and range from 30-90 Watt LED power creating a powerfully bright output for off road conditions. It's unique ultra slim chassis is striking in appearance and suitable for positions where other bars are unable to fit.

All eXterrain Raven bar lights come with Lifetime Warranty.






490mm/20" 90W LED Power Super Slim Single Row Bar Light



- Combo Beam (10°C+ 40°C)
- 490mm / 20"
- Reverse Polarity Protection
- UV Resistant
- Shock Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 90W (5W x 18) LEDs
- Current: 5.4/2.6A
- Operating Temperature: 40°C~ 85℃
- Colour Temperature: 6500K
- Luminous Flux: 8500LM
- IP68 Waterproof
- Dimensions: 494 x 26 x 51 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

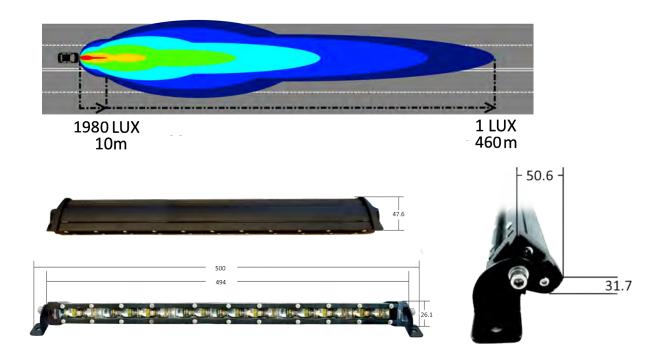






Super Slim Single Row Bar Light



- Combo Beam (10°C+ 40°C)
- 340 mm / 14"
- Reverse Polarity Protection
- **UV** Resistant
- Shock Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 60W (5W x 12) LEDs
- Current: 3.6/1.8A
- Operating Temperature: 40°C~ 85°C
- Colour Temperature: 6500K
- Luminous Flux: 5950LM
- IP68 Waterproof
- Dimensions: 342 x 26 x 51 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

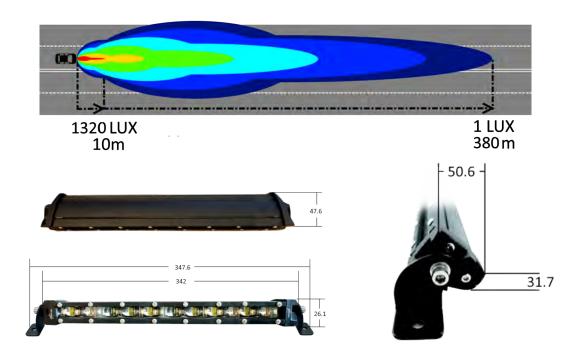





190mm/8" 30W Led Power

Super Slim Single Row Bar Light



- Combo Beam (10°C+ 40°C)
- 190 mm / 8"
- Reverse Polarity Protection
- UV Resistant
- Shock Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

Voltage: DC10-30V

• Power: 30W (5W x 6) LEDs

• Current: 1.8/0.9A

Operating Temperature: - 40°C~ 85℃

Colour Temperature: 6500K

Luminous Flux: 2550LM


IP68 Waterproof

• Dimensions: 190 x 26 x 51 (mm)

Lens: Lexan PC Shatterproof Front Cover

• Chassis: Die-cast Aluminium Alloy

Finish: Anodised Polyester Powder Coating

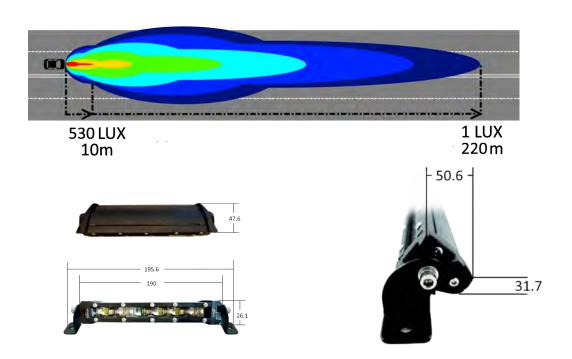





eXterrain's RAVEN Slim Dual Row bar spot light series are ideal for 4WD and truck installation. These lights have a combo beam of 10° and 40° and range from 48 - 300 Watt creating a powerfully bright output for on or off road conditions. With a unique slim chassis, it is striking in appearance especially when compared to other dual row bar lights available within the market.

All eXterrain Raven bar lights come with Lifetime Warranty.



RAVEN 1320: 1320mm/52" 300 Watt

Slim Dual Row Bar Light

- Combo Beam (10°C + 40°C)
- 1320 mm / 52"
- Reverse Polarity Protection
- UV Resistant
- Shock Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male Round Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

Voltage: DC10-30V

• Power: 300W (3W x 100) LEDs

• Current: 7/3.5A

Operating Temperature: - 40℃ ~ 85℃

Colour Temperature: 6500K

Luminous Flux: 24000LM


• IP68 Waterproof

Dimensions: 1377 x 82 x 60 (mm)

Lens: Lexan PC Shatterproof Front Cover

Chassis: Die-cast Aluminium Alloy

Finish: Anodised Polyester Powder Coating

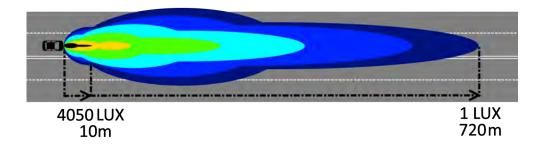



_	1377mm —
	1321mm
	Cepajaininkajaininjajaininjajaininjajaininjajaininjajaininjajainin




RAVEN 1070: 1070mm/42" 240 Watt



- Combo Beam (10°C + 40°C)
- 1070 mm / 42"
- Reverse Polarity Protection
- UV Resistant
- Shock Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male Round Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 240W (3W x 80) LEDs
- Current: 5.6/2.8A
- Operating Temperature: 40℃ ~ 85℃
- Colour Temperature: 6500K
- Luminous Flux: 19200LM
- IP68 Waterproof
- Dimensions: 1123 x 82 x 60 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

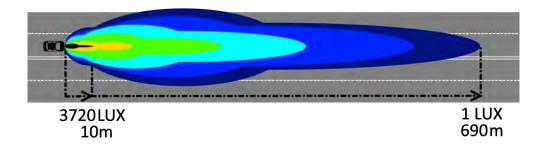




L	-1123mm
	1067mm
	Ceraminiariaminiariaminiaminiaminiaministro




RAVEN810:810mm/32" 180 Watt

- Combo Beam (10°C + 40°C)
- 810 mm / 32"
- Reverse Polarity Protection
- UV Resistant
- Shock Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 180W (3W x 60) LEDs
- Current: 4.2/2.1A
- Operating Temperature: 40℃ ~ 85℃
- Colour Temperature: 6500K
- Luminous Flux: 14400LM
- IP68 Waterproof
- Dimensions: 869 x 82 x 60 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

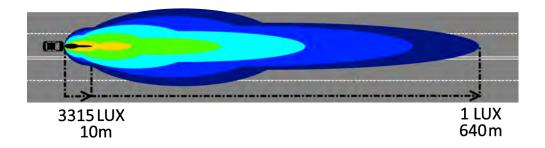








RAVEN560:560mm/22" 120 Watt




- Combo Beam (10°C + 40°C)
- 560 mm / 22"
- Reverse Polarity Protection
- UV Resistant
- Shock Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 120W (3W x 40) LEDs
- Current: 3.2/1.6A
- Operating Temperature: 40℃ ~ 85℃
- Colour Temperature: 6500K
- Luminous Flux: 9600LM
- IP68 Waterproof
- Dimensions: 613 x 82 x 60 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

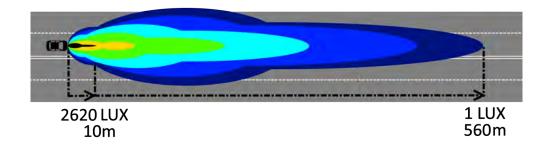



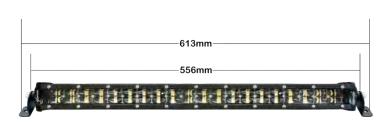




RAVEN350: 350mm/14" 72 Watt




- Combo Beam (10°C + 40°C)
- 350 mm / 14"
- Reverse Polarity Protection
- UV Resistant
- Shock Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 72W (3W x 24) LEDs
- Current: 2/1A
- Operating Temperature: 40°C ~ 85°C
- Colour Temperature: 6500K
- Luminous Flux: 5760LM
- IP68 Waterproof
- Dimensions: 412 x 82 x 60 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

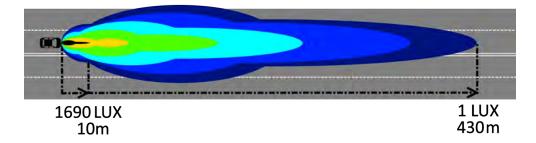








RAVEN240: 240mm/9.5" 48 Watt



- Combo Beam (10°C+ 40°C)
- 240 mm / 9.5"
- Reverse Polarity Protection
- UV Resistant
- Shock Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 48W (3W x 16) LEDs
- Current: 1.6/0.8A
- Operating Temperature: 40°C~ 85℃
- Colour Temperature: 6500K
- Luminous Flux: 3840LM
- IP68 Waterproof
- Dimensions: 297 x 82 x 60 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

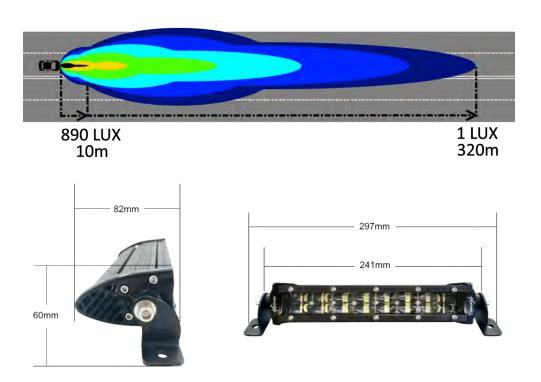









eXterrain's Raven Slim Quad Row bar light series are ideal for 4WD and truck installation. These lights have a combo beam of 10°+ 40° and range from 24-576 Watt LED power creating a powerfully bright output for off road conditions that has an extremely narrow profile compared to most quad rows available within the market.

All eXterrain Raven bar lights come with Lifetime Warranty.







1270 1270mm/50" 576W LED Power



- Combo Beam (10°C+ 40°C)
- 1270mm / 50"
- Reverse Polarity Protection
- UV Resistant
- Shock Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 576W (3W x 192) LEDs
- Current: 26.8/12.2A
- Operating Temperature: 40°C~ 85℃
- Colour Temperature: 6500K
- Luminous Flux: 48960LM
- IP68 Waterproof
- Dimensions: 1340 x 82 x 90 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

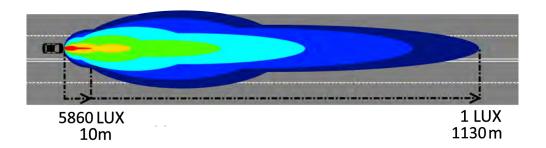











1070mm/42" 480W LED Power



- Combo Beam (10°C+ 40°C)
- 1070mm / 42"
- Reverse Polarity Protection
- UV Resistant
- Shock Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 480W (3W x 160) LEDs
- Current: 22.6/10A
- Operating Temperature: 40°C~ 85℃
- Colour Temperature: 6500K
- Luminous Flux: 40800LM
- IP68 Waterproof
- Dimensions: 1136 x 82 x 90 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

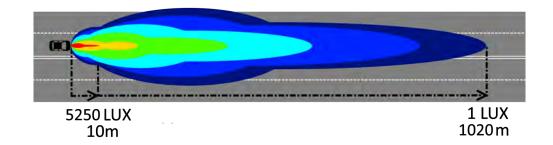

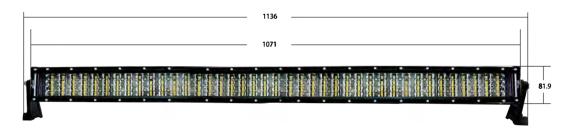









810mm/32" 360W LED Power



- Combo Beam (10°C+ 40°C)
- 810mm / 32"
- Reverse Polarity Protection
- UV Resistant
- Shock Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 360W (3W x 120) LEDs
- Current: 16.9/7.5A
- Operating Temperature: 40°C~ 85℃
- Colour Temperature: 6500K
- Luminous Flux: 30600LM
- IP68 Waterproof
- Dimensions: 881 x 82 x 90 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

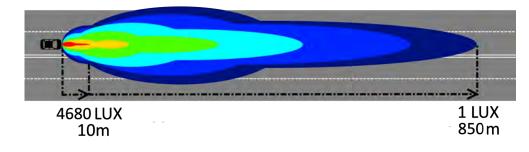

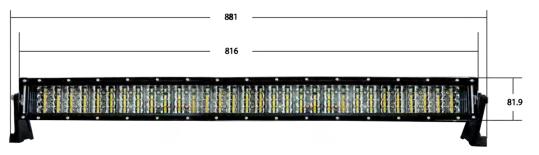








560mm/22" 240W LED Power



- Combo Beam (10°C+ 40°C)
- 560mm / 22"
- Reverse Polarity Protection
- UV Resistant
- Shock Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 240W (3W x 80) LEDs
- Current: 11.8/5A
- Operating Temperature: 40°C~ 85℃
- Colour Temperature: 6500K
- Luminous Flux: 20400LM
- IP68 Waterproof
- Dimensions: 626 x 82 x 90 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

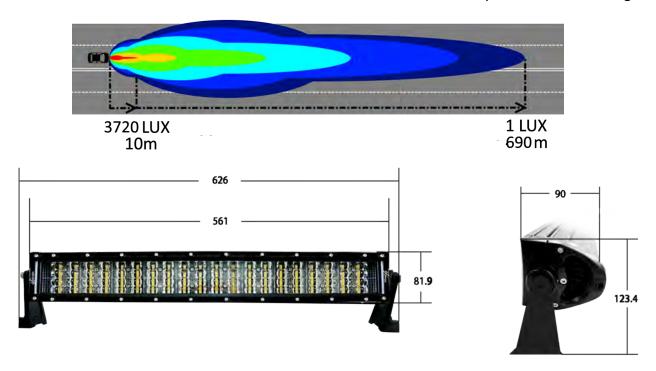





80mm/3.2" 24W LED Power

Slim Quad Row Pod Light



- Combo Beam (10°C+ 40°C)
- 80mm / 3.2"
- Reverse Polarity Protection
- UV Resistant
- Shock Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

Voltage: DC10-30V

• Power: 24W (3W x 8) LEDs

Current: 1.02/.55A

Operating Temperature: - 40°C~ 85°C

• Colour Temperature: 6500K

Luminous Flux: 2040LM

IP68 Waterproof

• Dimensions: 82 x 76 x 82 (mm)

Lens: Lexan PC Shatterproof Front Cover

• Chassis: Die-cast Aluminium Alloy

Finish: Anodised Polyester Powder Coating



Note: RavenX80 can also be sold as a pack—RavenX80RVP









Single Square Row Light Bars





eXterrain's Condor Single Square Row bar light series are ideal for 4WD and truck installation. These lights have a spot beam of 45° and range from 30-90 Watt LED power - creating a powerfully bright output over a large area.

All eXterrain Raven bar lights come with Lifetime Warranty.




CONDOR750 750mm/30" 90W LED Power

Single Square Row Bar Light



- Spot Beam (45°C)
- 750mm / 30"
- Reverse Polarity Protection
- UV Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 90W (5W x 18) LEDs
- Current: 5.4/2.6A
- Operating Temperature: 40°C~ 85°C
- Colour Temperature: 6500K
- Luminous Flux: 8500LM
- IP68 Waterproof
- Dimensions: 755 x 55 x 46 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

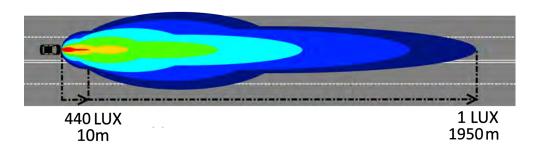










CONDOR510 510mm/20" 30W LED Power

Single Square Row Bar Light



- Spot Beam (45°C)
- 510mm / 20"
- Reverse Polarity Protection
- UV Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 60W (5W x 12) LEDs
- Current: 3.6/1.8A
- Operating Temperature: 40°C~ 85°C
- Colour Temperature: 6500K
- Luminous Flux: 5950LM
- IP68 Waterproof
- Dimensions: 515 x 55 x 46 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

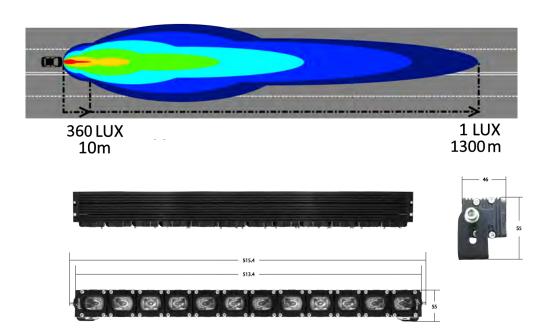






CONDOR270 270mm/11" 30W LED Power

Single Square Row Bar Light



- Spot Beam (45°C)
- 270mm / 11"
- Reverse Polarity Protection
- UV Resistant
- Rust/Corrosion/Freeze Resistant
- Olive Shaped Lens
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 30W (5W x 6) LEDs
- Current: 1.8/0.88A
- Operating Temperature: 40°C~ 85°C
- Colour Temperature: 6500K
- Luminous Flux: 2550LM
- IP68 Waterproof
- Dimensions: 275 x 55 x 46 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

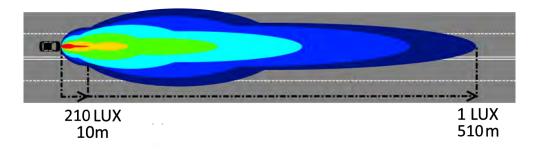







NIGHTOWL RANGE

LED SPOT LIGHTS



eXterrain's Night Owl series are ideal for 4WD and truck installation. These lights range from 50-150 Watt LED power - creating a powerfully bright output for off road conditions.

All eXterrain Raven bar lights come with Lifetime Warranty.




NIGHT OWL 150

9" 150W LED Power






- Spot Beam (90° + 10°)
- 9 inch
- Reverse Polarity Protection
- UV Resistant
- Rust/Corrosion/Freeze Resistant
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY





- Voltage: DC10-30V
- Power: 150W (5W x 30) LEDs
- Current: 5.4/10.8A
- Operating Temperature: 40°C~ 85℃
- Colour Temperature: 6500K
- Luminous Flux: 12000LM
- IP68 Waterproof
- Dimensions: D220 x H240 x W95 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

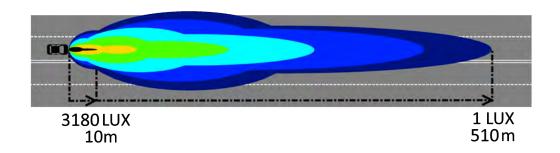




NIGHT OWL 140

9" 140W LED Power




- Spot Beam (90° + 10°)
- 9 inch
- Reverse Polarity Protection
- UV Resistant
- Rust/Corrosion/Freeze Resistant
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY





- Voltage: DC10-30V
- Power: 140W (5W x 24 + 20W x 1) LEDs
- Current: 4.43/8.85A
- Operating Temperature: 40°C~ 85℃
- Colour Temperature: 6000K
- Luminous Flux: 9476LM
- IP68 Waterproof
- Dimensions: D217 x H243 x W91 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

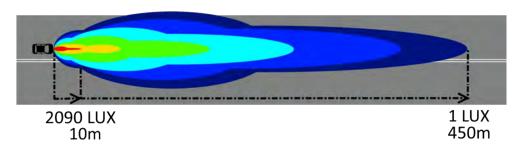




NIGHT OWL 50 7" 50W LED Power






- Spot Beam (90° + 15°)
- 7 inch
- Reverse Polarity Protection
- UV Resistant
- Rust/Corrosion/Freeze Resistant
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY



- Voltage: DC10-30V
- Power: 50W (50W x 1) Luminous LED
- Current: 1.5/2.9A
- Operating Temperature: 40°C~ 85°C
- Colour Temperature: 6500K
- Luminous Flux: 4250LM
- IP68 Waterproof
- Dimensions: D176 x H205 x W152 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

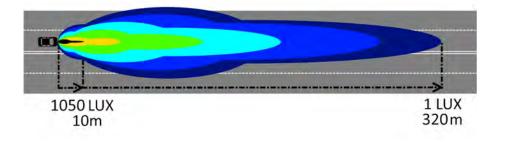





HARRIER AND CANARY RANGE

WORK LIGHTS



eXterrain's engineer light, Harrier and Canary series are ideal for 4WD and truck installation. This range has the option of spot and flood beam—ideal for you to choose the right beam suitable for your application.


All eXterrain Raven bar lights come with Lifetime Warranty.




ENGINEERS LIGHT 100W LED Power




Single Square Flood Light



- Flood Beam (90°C + 60°C)
- Reverse Polarity Protection
- UV Resistant
- Rust/Corrosion/Freeze Resistant
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY



- Voltage: DC10-30V
- Power: 100W (5W x 20) LEDs
 - Current: 3.5/7.8A
- Operating Temperature: 40°C~ 85℃
- Colour Temperature: 6500K
- Luminous Flux: 8500LM
- IP68 Waterproof
- Dimensions: D152 x H141 x W115 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

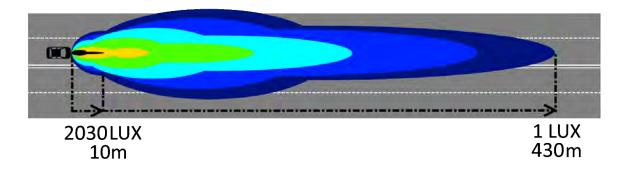



HARRIER50R


4.5" 50W LED Power

Single Round Flood Light






- Flood Beam (90°C + 60°C)
- 4.5 inch
- Reverse Polarity Protection
- UV Resistant
- Rust/Corrosion/Freeze Resistant
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY



- Voltage: DC10-30V
- Power: 50W (5W x 10) LEDs
- Current: 1.9/3.8A
- Operating Temperature: 40°C~ 85°C
- Colour Temperature: 6500K
- Luminous Flux: 4250LM
- IP68 Waterproof
- Dimensions: D109 x H116 x W75 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

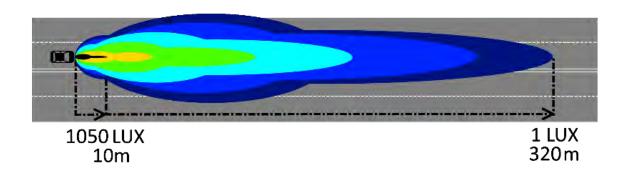



HARRIER40S 4.5" 40W LED Power


Single Rectangle Flood Light







- Flood Beam (90°C + 60°C)
- Reverse Polarity Protection
- UV Resistant
- Rust/Corrosion/Freeze Resistant
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

- Voltage: DC10-30V
- Power: 40W (5W x 8) LEDs
- Current: 1.4/2.8A
- Operating Temperature: 40°C~ 85℃
- Colour Temperature: 6500K
- Luminous Flux: 3400LM
- IP68 Waterproof
- Dimensions: D150 x H98 x W70 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating





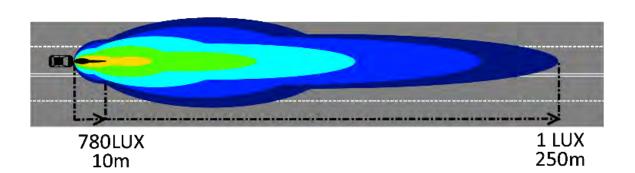




CANARY42 4.5" 42W LED Power






- Spot Beam (90°C + 10°C)
- 4.5 inch
- Reverse Polarity Protection
- UV Resistant
- Rust/Corrosion/Freeze Resistant
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY



- Voltage: DC10-30V
- Power: 42W (3W x 14) LEDs
- Current: 5.4/10.8A
- Operating Temperature: 40°C~ 85°C
- Colour Temperature: 6500K
- Luminous Flux: 2520LM
- IP68 Waterproof
- Dimensions: D112 x H126 x W20 (mm)
- Lens: Lexan PC Shatterproof Front Cover
- Chassis: Die-cast Aluminium Alloy
- Finish: Anodised Polyester Powder Coating

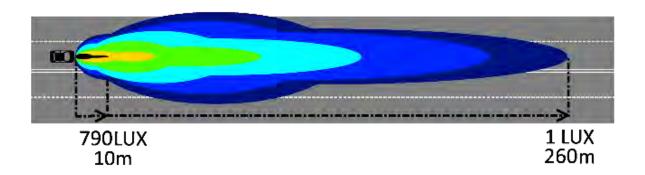



CANARY27 4.5" 27W LED Power

Single Round Spot Light



- Spot Beam (90°C + 10°C)
- 4.5 inch
- Reverse Polarity Protection
- UV Resistant
- Rust/Corrosion/Freeze Resistant
- Includes Male DT Connector
- Ideal for Cars, 4X4 and Trucks
- LIFETIME WARRANTY

Voltage: DC10-30V

• Power: 27W (3W x 9) LEDs

Current: 5.4/10.8A

• Operating Temperature: - 40°C~ 85°C

Colour Temperature: 6500K

Luminous Flux: 1080LM


IP68 Waterproof


Dimensions: D112 x H126 x W39 (mm)

Lens: Lexan PC Shatterproof Front Cover

• Chassis: Die-cast Aluminium Alloy

• Finish: Anodised Polyester Powder Coating



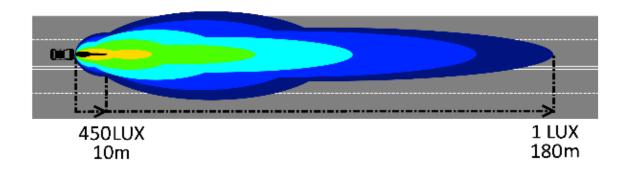



HITCHMOUNT



The Hitchmount is designed to be compatible with most vehicles with a 2" / 50mm hitch receiver. It comes with a lock in bolt—intended to lock the hitch mount on the tow bar and remove play ensuring stability.


Material: Aluminum

• Finish: Black Powder coated

Bolt: 20mm long (extra support)

• Diameter of hole for bolt: 8mm


LIFETIME WARRANTY

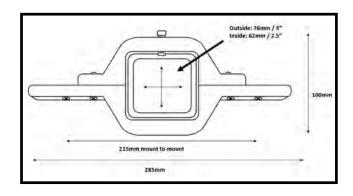


The picture below is an example of use. The eXterrain SDSMount brackets are attached to eXterrain Raven Light Bar series.

Please note: eXterrain's hitch mount is universal and can be used for any light. It is ideally suited for the RAVEN350 or 2 x RavenX80.

Bar light and Slide brackets



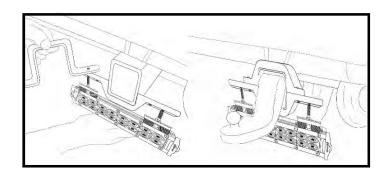



REVERSE LIGHTING

HITCHL24 is designed to be compatible with most vehicles with 2" / 50mm hitch receiver.

FEATURES:

Voltage: 12V

Power: 24W 2 x (12 x 1W) LEDs

Current: 2AOn/Off Switch

Reverse Polarity Protection

Shock Resistant

Operating Temperature: - 40 ~ 85 °C

Colour Temperature: 6000K

IP67 Waterproof

Includes Lock-in Screw

Hitch Receiver: 50 x 50 (mm)


Built-in Connector and Wiring Loom

Dimensions: 200 x 83 x 73 (mm)

Material: PlasticFinish: Black







RAVEN350RVP is a reverse pack consisting of 1 \times HITCHMOUNT, 1 \times RAVEN350, 1 \times pair of SDSMOUNT and 1 \times LOOM1.



RAVENX80RVP is a reverse pack consisting of 1 \times HITCHMOUNT, 2 \times RAVENX80, and 1 \times LOOM2.










Wiring Loom

Connector & Wiring Information

eXterrain bar and spot lights come with a built-in male DT (or Round connector for high powered lights). If connector is not required, the connector can be cut and hard wired. Also includes wire to optionally connect to high beams. See diagram below.

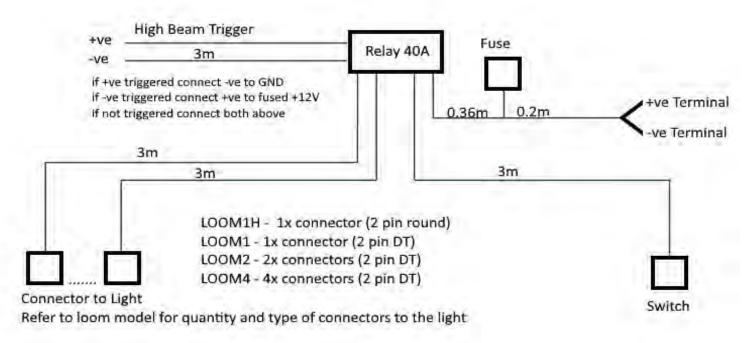

Please note: All loom must be operated on <u>12 Volt only</u>— LOOM1H (MAX 480W), LOOM1 (MAX 180W), LOOM2 (MAX 360W) AND LOOM4 (MAX 480W).














BBB/: Universal Brackets

eXterrain Universal brackets are suitable for the mounting of lights on tube or bar. Available sizes include:

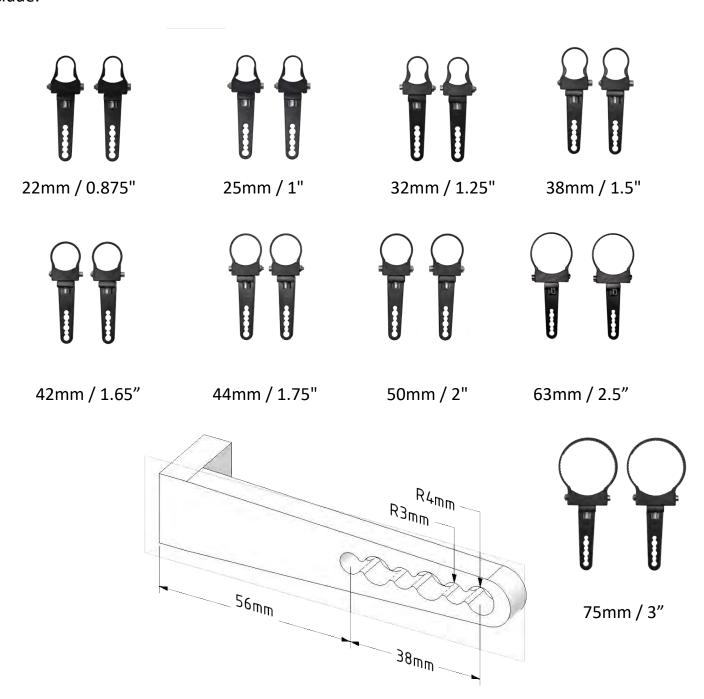



BC/: Open Universal Bar Clamps

eXterrain Open universal bar brackets are suitable for the mounting of lights on tube, roof racks or bars. They are also ideally suited as slide brackets for eXterrain Condor Bar Lights. Available sizes include:





75mm / 3"



SDSMOUNT: Slide Brackets

eXterrain Slide Brackets - SDSMOUNT can be fitted on the bottom of eXterrain RAVEN Slim Dual LED Bar Lights. These brackets can slide to nearly any position along the light, allowing it to be mounted to a flat surface, spot light mounts or eXterrain's reverse HITCHMOUNT.

The SDSMOUNT uses the M8 bolt—30mm height from the base to bottom of bar light.



SSSMOUNT: Slide Brackets

eXterrain Slide Brackets - SSS MOUNT are fitted by sliding across the top of eXterrain RAVEN S slim single row LED bar lights. These brackets can slide to nearly any position along the light, allowing it to be mounted to a flat surface.







exterrain.com.au